

Push type panic exit devices

Rim model: 1930

Rim panic devices with 2 locking points, upper and lower. Steel swing latches.

Standard height: 2210mm.

Outside devices.

EN 1125 certification:

3 7 6 B 1 3 2 2 A A

The box includes:


- » 1 main support and a secondary support.
- » 1 oval shape horizontal bar of 900 mm length.
- » 2 vertical rods of 930 mm.
- » Accessories bag includes: Fixing screws, screws witch support the horizontal bar, 1 square spindle, 2 vertical rod guides and strikes.
- » Assembly instructions and installation template.
- » 2 locking points, upper and lower.

Model	Bar length	Square spindle mm	Cover finish mm	Bar finish	Product code
1930	900	8	Black	Green	1930908NV
1930	900	8	Black	Black	1930908NN
1930	900	8	Black	Red	1930908NR
1930	900	8	Black	Chrome plated	1930908NC
1930	900	8	Black	Stainless steel	1930908NI
1930	900	8	Nickel plated	Chrome plated	1930908SC
1930	900	8	Nickel plated	Stainless steel	1930908SI
1930	900	8	Stainless steel	Stainless steel	1930908II
1930	900	8	Silver	Silver	1930908PP
1930	900	8	Brass plated	Brass plated	1930908LT


Highlighted part numbers: "Express 5" service.

Configuration


1 leaf door



2 leaf door

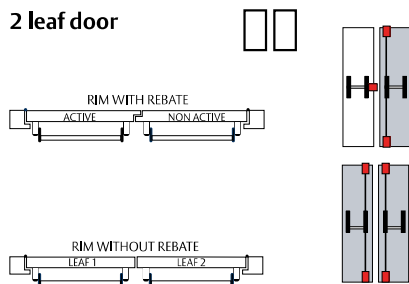

1930 nickel plated finish.

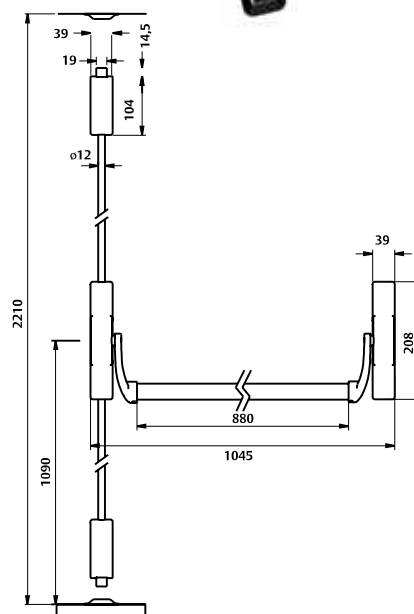

Outside device	Blind plate	Euro-profile plate	Lever handle with euro-profile	Lever handle	Pull knob with euro-profile	Modular lever handle
No outside opening	•					
Free passing door				•		•
Cylinder locking			•			•
	Knob / lever handle opening					•
	Captive key system					• (1)

(1) It is needed to lock the outside access device to remove the key